


我们的技术和服务
Our Techology & Services



光学设计
Optical design



温升测试
Temperature rise test




积分球测试
Integrating ball test



生产车间
Production workshop



老化测试
Aging test



防水测试
Waterproof test

产品目录
PRODUCT
DIRECTORY

01 LED玉米灯
LED Corn Light 01-10



02 LED工矿灯
LED High Bay 11-18



03 LED投光灯
LED Flood Light 19-30





04 LED路灯
LED Street Light 31-36



LED CORN LIGHT PRODUCT FEATURES

LED 玉米灯产品特性

- 散热器为6063铝，经过阳极氧化处理，带PC防护罩，防腐，不积尘，不产生静电；
- 硅胶线，不锈钢螺丝；
- 认证：CE, RoHS, ETL, DLC；
- 防护等级保护：IP64；
- Is 6063 aluminum radiator, anodic oxidation treated Heat sink and PC housing protects the light from rotting and dust, static electricity;
- Silicone wire, stainless steel screw;
- Certified:CE, RoHS, ETL, DLC;
- Range of protection:IP64;

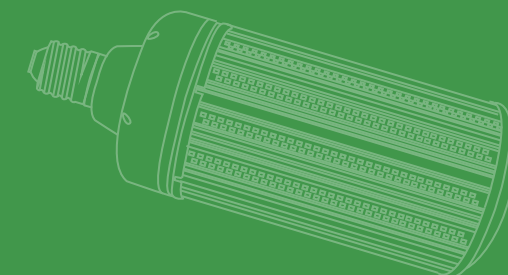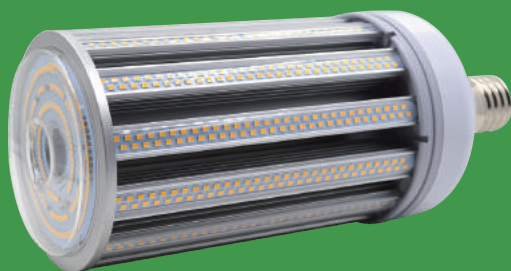

LED CORN LIGHT 系列 SERIES

- 适用范围：庭院灯、路灯、草坪灯、中华灯、玉兰灯、室内外照明等。
- This product is mainly used in the courtyard lamp, street lamp, lawn lamp, lights, yulan lights, Indoor and outdoor lighting, etc.



QUEENDOM

LED CORN LIGHT PRODUCT FEATURES

GH-CL6 series

产品特性

正品进口SMD2835灯珠，高光效，110-150LM/W
长寿命红宝石电解电容，高精度恒流控制芯片
透明罩、乳白罩可选
3/5年质保承诺，防护等级IP64

FEATURES


Quality goods imported SMD2835 chip lamp bead,
high photosynthetic efficiency, 110-150 lm/W
Long life ruby electrolytic capacitor, high precision
constant current control chip
Transparent cover, opalescent cover is optional
3/5 year warranty , IP grade IP64

灯具材质

6063铝

MATERIAL

6063 aluminum




LED WATERPROOF CORN LIGHT

功率 / System Wattage
12W 16W 20W 24W 25W
30W 35W 40W 50W 60W

型号 / Model Number		
GH-CL6-12W (Φ64 x 157mm)	GH-CL6-16W (Φ64 x 167mm)	GH-CL6-20W (Φ64 x 187mm)
GH-CL6-24W (Φ64 x 207mm)	GH-CL6-30W (Φ93 x 245mm)	GH-CL6-35W (Φ93 x 265mm)
GH-CL6-40W (Φ93 x 285mm)	GH-CL6-50W (Φ93 x 305mm)	GH-CL6-60W (Φ93 x 315mm)



- 色温 / CCT:2700-6500K
- 灯头 / Base Type:E26,E27,E39,E40
- 电压 / Voltage:AC85-265V / DC12-24V
- 工作温度 / Operating temperature:-30~+45℃





IP64

LED CORN LIGHT PRODUCT FEATURES

GH-CL6 series




6063铝
6063 Aluminium

2835灯珠
SMD2835 LED

E39,E40 灯头
E39,E40 base

认证电源
Certification driver

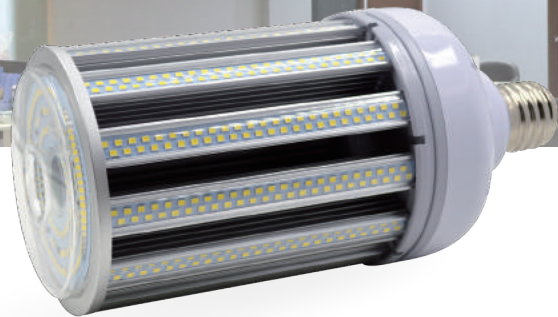


- 色温 / CCT:2700-6500K
- 电压 / Voltage:AC85-265V / DC12-24V
- 工作温度 / Operating temperature:-30~+45℃




GH-CL6-80W

功率 / Power: 80W
产品尺寸 / Prod-size: Φ 133*262mm




GH-CL6-100W

功率 / Power: 100W
产品尺寸 / Prod-size: Φ 133*282mm




GH-CL6-120W

功率 / Power: 120W
产品尺寸 / Prod-size: Φ 133*302mm



GH-CL6-140W

功率 / Power: 140W
产品尺寸 / Prod-size: Φ 133*341mm



LED CORN LIGHT PRODUCT FEATURES

GH-CL7 series

产品特性

正品进口SMD2835灯珠，高光效，110~130LM/W
长寿命红宝石电解电容，高精度恒流控制芯片
热电分离设计，产品更安全
3年质保承诺

FEATURES

Quality goods imported SMD2835 chip lamp bead,
high photosynthetic efficiency, 110-130 lm/W
Long life ruby electrolytic capacitor, high precision
constant current control chip
Thermoelectric separation design makes the product safer
3 years warranty

灯具材质

6063铝


MATERIAL

6063 aluminum




GH-CL7-10W

功率 / Power: 10W
产品尺寸 / Prod-size: $\Phi 52 \times 165\text{mm}$
净重 / NW: 185g




GH-CL7-15W

功率 / Power: 15W
产品尺寸 / Prod-size: $\Phi 52 \times 195\text{mm}$
净重 / NW: 210g




GH-CL7-20W

功率 / Power: 20W
产品尺寸 / Prod-size: $\Phi 52 \times 215\text{mm}$
净重 / NW: 245g




GH-CL7-25W

功率 / Power: 25W
产品尺寸 / Prod-size: $\Phi 73 \times 220\text{mm}$
净重 / NW: 495g




GH-CL7-30W

功率 / Power: 30W
产品尺寸 / Prod-size: $\Phi 73 \times 240\text{mm}$
净重 / NW: 496g




GH-CL7-35W

功率 / Power: 35W
产品尺寸 / Prod-size: $\Phi 73 \times 260\text{mm}$
净重 / NW: 548g



GH-CL7-40W

功率 / Power: 40W
产品尺寸 / Prod-size: $\Phi 73 \times 280\text{mm}$
净重 / NW: 592g





QUEENDOM

LED CORN LIGHT PRODUCT FEATURES

GH-CL8B series

产品特性

正品进口SMD2835灯珠，高光效，130-150LM/W
纯铝1050鳍片散热器，散热面积更大
内置风扇，散热更强
3 / 5年质保承诺

FEATURES


Quality goods imported SMD2835 chip lamp bead,
high photosynthetic efficiency, 130-150lm/W
Pure aluminum 1050 fin radiator, the heat dissipation area is larger
Built-in fan, better heat dissipation
3 / 5 years warranty

灯具材质

1050铝

MATERIAL

1050 aluminum

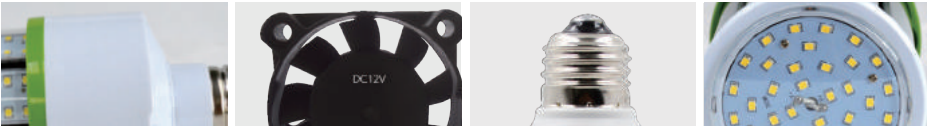


LED FINS COVERED CORN LIGHT

功率 / System Wattage
20W 30W 40W 60W 80W
100W 120W 150W 200W

型号 / Model Number
GH-CL8B-20W (Φ93 x 185mm) GH-CL8B-30W (Φ93 x 221mm) GH-CL8B-40W (Φ93 x 253mm)
GH-CL8B-60W (Φ93 x 277mm) GH-CL8B-80W (Φ125 x 259mm) GH-CL8B-100W (Φ125 x 278mm)
GH-CL8B-120W (Φ125 x 294mm) GH-CL8B-150W (Φ125 x 324mm) GH-CL8B-200W (Φ125 x 330mm)



- 色温 / CCT:2700-6500K
- 灯头 / Base Type:E26,E27,E39,E40
- 电压 / Voltage:AC85-265V / DC12-24V
- 工作温度 / Operating temperature:-30~+45℃



LED HIGH BAY PRODUCT FEATURES

LED 工矿灯产品特性

- 明纬电源，高品质保证，寿命更长；
- 进口飞利浦灯珠，效率高、光衰小；
- 认证：UL、3C、SAA、CE等；
- 防护等级保护：IP66；
- Meanwell driver, high quality guarantee, longer life;;
- Philips lamp, High efficiency and low light decay;
- Certified: UL、3C、SAA、CE etc.;
- Range of protection: IP66;



LED HIGH BAY 系列 SERIES

- 适用范围：室内高工业厂房、体育馆、设备制造业工厂、仓库、车间照明等
- Application:
High industrial factory building,
gymnasium, indoor lighting
equipment manufacturing
factory, warehouse, workshop, etc

LED HIGH BAY PRODUCT FEATURES


GH-HBLH series



明纬电源
Meanwell driver



304 不锈钢挂钩
304 Alu.M12




ADC12压铸铝
ADC12 die-casting aluminum




飞利浦3030灯珠
Philips 3030 lamp beads

GH-HBLH



材质 / Material: ADC12压铸铝 / ADC12 die-casting aluminum 电压 / Voltage: AC85~265V

色温 / CCT: 2700K~6500K 防护等级 / IP Rating: IP66 透镜角度 / lens angle: 60° 90° 120°

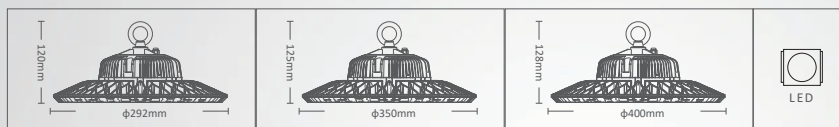

产品型号 Product Code	功率 Wattage	光效 Efficiency	产品尺寸 Prod-Dimension
GH-HBLH-100W	100W	150LM/W	Φ292 x 120mm
GH-HBLH-150W	150W		Φ350 x 125mm
GH-HBLH-200W	200W		Φ400 x 128mm



产品特性

正品进口飞利浦灯珠，高光效，150LM/W

明纬电源，品质保证

5年质保承诺

防护等级IP66

FEATURES

Quality goods imported chip lamp bead,
high photosynthetic efficiency, 150 lm/W

Meanwell driver, quality assurance

5 years warranty

IP grade IP66

灯具材质

ADC12压铸铝

MATERIAL

ADC12 die-casting aluminum





LED HIGH BAY PRODUCT FEATURES

GH-QHB series

产品特性

鳍片散热器，散热效果好，重量轻，阳极氧化处理，耐腐蚀，免积尘
正品进口飞利浦灯珠，高光效，130LM/W
反光罩角度：45° 90° 120°
明纬电源，5年质保承诺
防护等级IP66

FEATURES

Fin radiator, good heat dissipation effect, light weight, anodic oxidation treatment, corrosion resistance, dust free
Genuine imported philips lamp beads with high luminous efficiency, 130LM/W
Cover beam angle: 45°, 60°, 90°, 120°
Meanwell driver, 5 years warranty
IP grade IP66

灯具材质

鳍片

MATERIAL

Fins



PRODUCT PARAMETERS


产品参数

LED HIGH BAY




GH-QHB-100W

功率 / Power: 100W
产品尺寸 / Prod-size: Φ 425 x 335mm




GH-QHB-150W

功率 / Power: 150W
产品尺寸 / Prod-size: Φ 425 x 340mm




GH-QHB-200W

功率 / Power: 200W
产品尺寸 / Prod-size: Φ 425 x 360mm



GH-QHB-240W

功率 / Power: 240W
产品尺寸 / Prod-size: Φ 425 x 400mm



LED HIGH BAY PRODUCT FEATURES

GH-HB series



产品特性

进口飞利浦或者CREE灯珠，高光效，>110LM/W
散热器表面电泳处理，鳍片加铜管散热方式，散热效果更加
灯罩角度: 25° 60° 90°
明纬电源，5年质保承诺
防护等级IP65

FEATURES

Imported philips or CREE lamp bead, high luminous efficiency, 130LM/W
Radiators surface electrophoresis treatment, fin and copper pipe heat, heat effect is more
Cover angle: 25°60°90°
Meanwell driver, 5 years warranty
protection grade IP65

灯具材质

鳍片+铜管


MATERIAL

Fin and brass




GH-HB-100W

功率 / Power: 100W
产品尺寸 / Prod-size: $\phi 374 \times H459\text{mm}$
净重 / NW: 5.5kg




GH-HB-120W

功率 / Power: 120W
产品尺寸 / Prod-size: $\phi 374 \times H467\text{mm}$
净重 / NW: 6kg




GH-HB-150W

功率 / Power: 150W
产品尺寸 / Prod-size: $\phi 374 \times H459\text{mm}$
净重 / NW: 7.5kg




GH-HB-200W

功率 / Power: 200W
产品尺寸 / Prod-size: $\phi 374 \times H467\text{mm}$
净重 / NW: 6.8kg




GH-HB-300W

功率 / Power: 300W
产品尺寸 / Prod-size: $\phi 374 \times H459\text{mm}$
净重 / NW: 9kg




GH-HB-400W

功率 / Power: 400W
产品尺寸 / Prod-size: $\phi 374 \times H497\text{mm}$
净重 / NW: 11.5kg



GH-HB-500W


功率 / Power: 500W
产品尺寸 / Prod-size: $\phi 374 \times H497\text{mm}$
净重 / NW: 12kg



LED FLOOD LIGHT PRODUCT FEATURES

LED投光灯产品特性

- 压铸铝灯体，具有防腐蚀环保功能；
- 进口LED灯珠，使用寿命长50000小时以上；
- 认证：CE, RoHS, ETL, DLC；
- 防护等级保护：IP65；
- Die casting aluminum lamp body, with corrosion protection function;
- Imported LED beads, with a service life of more than 50,000 hours;
- Certified:CE, RoHS, ETL, DLC;
- Range of protection:IP64;

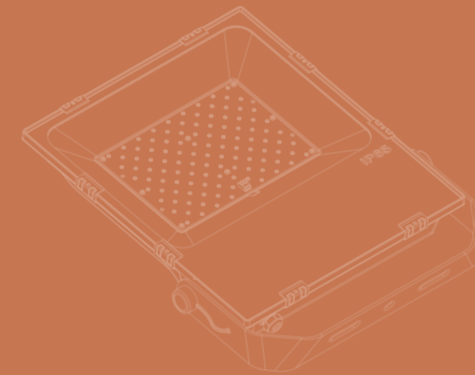

投光灯

LED FLOOD LIGHT
系列 SERIES

- 适用范围：商场、展览馆、停车场、运动场、体育馆、广告牌、公园、雕塑、国家绿色照明工程、建筑立面以及公共走廊室外照明
- Application: shopping mall,exhibition hall,parkinglot,playground,gymnasium, billboards,park,sculpture,national green lighting project,Outdoor lighting for building facade and public corridor

LED FLOOD LIGHT PRODUCT FEATURES

GH-TG series

产品特性

超薄流线型外观设计, 时尚经典
创新G型扣技术, 防玻璃脱离, 安装便捷
正品进口飞利浦灯珠, 高光效, 130LM/W
3/5年质保承诺, 防护等级IP65

FEATURES

Ultra-slim sleek design, stylish and classic.
Innovative G-buckle technology, prevent glass off, easy for assembling.
Genuine imported philips lamp beads with high luminous efficiency, 130LM/W
3/5 year warranty, IP grade IP65

灯具材质

ADC12压铸铝

MATERIAL

ADC12 die-casting aluminum



G型技术, 防玻璃脱离
G-type technology, glass detachment



明纬电源
Meanwell driver



超薄流线型外观设计
Ultra-slim sleek design



飞利浦灯珠
Philips LED chips





·色温 / CCT:2700-6500K

·发光角度 / Beam angle:120°

·电压 / Voltage:AC85-265V / DC12-24V

·工作温度 / Operating temperature:-30~+55℃

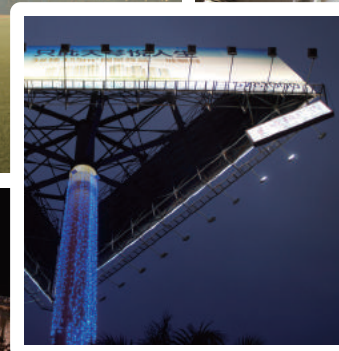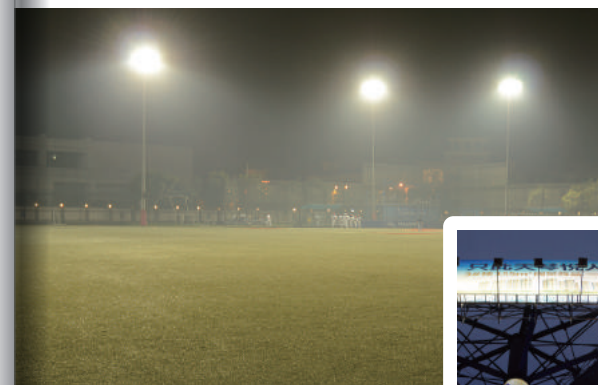

LED ULTRA-THIN FLOOD LIGHT

功率 / System Wattage

10W 20W 30W 50W 80W
100W 150W 200W

型号 / Model Number

GH-TG-10W (166 x 116 x 32mm)	GH-TG-20W (216 x 152 x 40mm)	GH-TG-30W (226 x 167 x 40mm)
GH-TG-50W (310 x 220 x 50mm)	GH-TG-80W (354 x 245 x 55mm)	GH-TG-100W (430 x 330 x 60mm)
GH-TG-150W (430 x 330 x 60mm)	GH-TG-200W (470 x 360 x 60mm)	



LED FLOOD LIGHT PRODUCT FEATURES

GH-SF series



产品特性

进口飞利浦灯珠，高光效，130LM/W
1060鳍片式纯铝散热器
明纬电源，5年质保承诺
防护等级IP65

FEATURES

Imported philips lamp bead, high luminous efficiency, 130LM/W
1060 fin pure aluminum radiator
Meanwell driver, 5 years warranty
IP grade IP65

灯具材质

1060铝


MATERIAL

1060 aluminum




GH-SF-50W

功率 / Power: 50W
产品尺寸 / Prod-size: 315*93*130mm
净重 / NW: 3.65kg




GH-SF-100W

功率 / Power: 100W
产品尺寸 / Prod-size: 315*238*130mm
净重 / NW: 4.52kg




GH-SF-150W

功率 / Power: 150W
产品尺寸 / Prod-size: 315*283*130mm
净重 / NW: 5.17kg




GH-SF-200W

功率 / Power: 200W
产品尺寸 / Prod-size: 315*373*130mm
净重 / NW: 6.65kg




GH-SF-300W

功率 / Power: 300W
产品尺寸 / Prod-size: 315*283*130mm
净重 / NW: 8.93kg



GH-SF-400W

功率 / Power: 400W
产品尺寸 / Prod-size: 315*373*130mm
净重 / NW: 11.51kg



LED FLOOD LIGHT PRODUCT FEATURES

GH-TFT series



LED

MODULE ANGLE ADJUSTMENT FLOOD LIGHT

功率 / System Wattage

120W 240W 360W 480W 720W


960W 1200W 1500W

型号 / Model Number

GH-TFT-120W (310 x 116 x 190mm)	GH-TFT-240W (356 x 265 x 190mm)	GH-TFT-360W (356 x 398 x 190mm)
------------------------------------	------------------------------------	------------------------------------

GH-TFT-480W (356 x 530 x 190mm)	GH-TFT-720W (650 x 398 x 190mm)	GH-TFT-960W (650 x 530 x 190mm)
------------------------------------	------------------------------------	------------------------------------

GH-TFT-1200W (650 x 670 x 190mm)	GH-TFT-1500W (650 x 812 x 190mm)
-------------------------------------	-------------------------------------

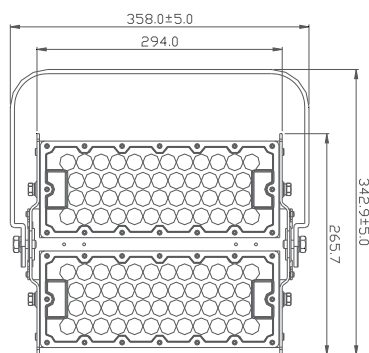

产品特性

1060鳍片式纯铝散热器

单个模组可60度调节角度

进口飞利浦或者欧司朗灯珠, 高光效, 145-160LM/W

透镜角度: 20° / 40° / 60° / 90° / 140° / 100° / 无角度PC罩

明纬电源, 5年质保承诺

防护等级: IP65

FEATURES

1060 fin pure aluminum radiator

Single module can adjust Angle by 60 degrees

Imported philips or osram lamp beads with high luminous efficiency, 145-160lm/W

Lens Angle: 20° / 40° / 60° / 90° / PC / 140° * 100° / No Angle PC cover

Meanwell driver, 5 years warranty

IP grade: IP65

灯具材质

1060铝

MATERIAL

1060 aluminum

适用场所

广泛应用于羽毛球场, 足球场, 篮球场等各大球场照明

FEATURES

Widely used in badminton field, football field, basketball field, etc

160LM/W
HI-EFFICIENCY



LED FLOOD LIGHT PRODUCT FEATURES

GH-TFTB series

产品特性

1060鳍片式纯铝散热器

单个模组可360度调节角度

进口飞利浦或者欧司朗灯珠，高光效，145-160LM/W

透镜角度：20° /40° /60° /90° /140°100° /无角度PC罩

明纬电源，5年质保承诺

防护等级：IP65

FEATURES

1060 fin pure aluminum radiator

A single module can adjust the Angle 360 degrees

Imported philips or osram lamp beads with high luminous efficiency,145-160lm/W

Lens Angle: 20 ° / 40 °, 60 ° 90 ° / PC / 140 * 100 ° / No Angle PC cover

Meanwell driver, 5 years warranty

IP grade IP65

应用场景

广泛应用于机场照明、车站照明、码头照明、广场照明等室外照明

MATERIAL

Widely used in airport lighting, station lighting, dock lighting, square lighting and other outdoor lighting



160LM/W
HI-EFFICIENCY



LED

MODULE ANGLE ADJUSTMENT FLOOD LIGHT

功率 / System Wattage

720W 960W 1200W 1500W

型号 / Model Number

GH-TFTB-720W (694 x 268 x 726mm) GH-TFTB-960W (694 x 268 x 855mm) GH-TFTB-1200W (694 x 268 x 987mm)

GH-TFTB-1500W

(694 x 268 x 1190mm)



LED FLOOD LIGHT PRODUCT FEATURES

GH-TFD series



LED

SINGLE MODULE FOR 360° ANGLE ADJUSTMENT

功率 / System Wattage
120W 150W 240W 300W 360W
450W 480W 600W 720W 900W
960W 1200W

型号 / Model Number

GH-TFD-120W (330 x 210 x 80mm)	GH-TFD-150W (330 x 210 x 80mm)	GH-TFD-240W (330 x 360 x 83mm)
GH-TFD-300W (330 x 360 x 83mm)	GH-TFD-360W (330 x 550 x 83mm)	GH-TFD-450W (330 x 550 x 83mm)
GH-TFD-480W (330 x 680 x 83mm)	GH-TFD-600W (330 x 680 x 83mm)	GH-TFD-720W (622 x 550 x 83mm)
GH-TFD-900W (622 x 550 x 83mm)	GH-TFD-960W (622 x 680 x 83mm)	GH-TFD-1200W (622 x 680 x 83mm)



产品特性

- 1060鳍片式纯铝模组散热器
- 单个模组可360° 调节角度配光
- 进口飞利浦灯珠，高光效，145-165LM/W
- 透镜角度：8° /20° /40° /60° /90° /140°100° /无角度PC罩
- 明纬电源，5年质保承诺
- 防护等级：IP65

FEATURES

- 1060 Fin-type pure aluminum module radiator
- Single module for 360° angle adjustment
- Imported Philips lamp beads, high luminous efficiency, 145-165LM/W
- Lens angle: 8°/20°/40°/60°/ 90°/140°100°/ no angle PC cover
- Meanwell driver, 5 years warranty
- IP grade: IP65

灯具材质

1060铝

MATERIAL

1060 aluminum

适用场所

广泛应用于羽毛球场，足球场，篮球场等各大球场照明，以及机场照明、车站照明、码头照明、广场照明等室外照明


FEATURES

Widely used in badminton courts, football fields, basketball courts and other stadium lighting, as well as outdoor lighting at airports, stations, terminals, squares, etc.



165LM/W
HI-EFFICIENCY



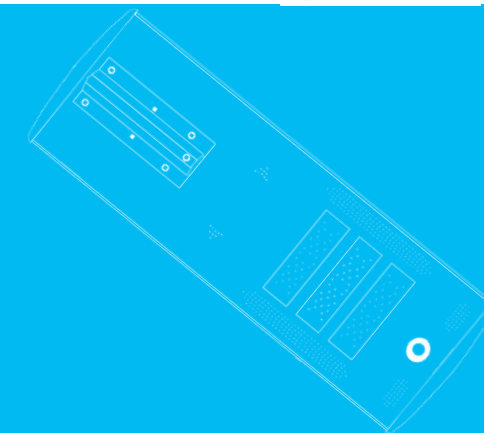

LED SOLAR STREET LAMP PRODUCT FEATURES

LED 太阳能路灯产品特性

- 散热器为6063铝，采用加厚防腐喷漆处理;
- 锂电池，定制磷酸铁锂;
- 不需要额外的布线，节省安装成本;
- 防护等级保护：IP65;
- Radiator is 6063 aluminum and is treated by thickening anticorrosive paint spraying;
- Lithium battery, customized lithium iron phosphate;
- No extra wiring required, save installation cost;
- Range of protection: IP65;



太阳能 路灯


Solar street lamp 系列 SERIES

- 适用范围：城市广场、停车场、学校操场、工人绿地、公园照明，乡镇等偏远地区公路街道照明
- Application: city square, parking lot, school playground, worker green space, park lighting, Towns and road and street lighting in remote areas



LED SOLAR STREET LIGHT PRODUCT FEATURES

GH-STL series
太阳能路灯



进口灯珠
Imported lamp bead

散热孔
Ventilation

智能感应器
Smart sensor

锂电池
Lithium battery

GH-STL



材质 / Material: 6063铝材 / 6063 Aluminum 透镜角度 / Lens Angle: 60 x 60° / 90 x 90° / 80 x 120°
色温 / CCT: 2700K-6500K 防护等级 / IP Rating: IP65

产品型号 Product Code	功率 Wattage	光效 Efficiency	产品尺寸 Prod-Dimension
GH-STL-15W	15W	150LM/W	665 x 296 x 45mm
GH-STL-25W	25W		845 x 296 x 45mm
GH-STL-30W	30W		1095 x 296 x 45mm
GH-STL-50W	50W		1095 x 420 x 45mm
GH-STL-60W	60W		1190 x 420 x 45mm
GH-STL-80W	80W		1470 x 420 x 45mm
GH-STL-100W	100W		1685 x 420 x 45mm

“0”电费的灯

A LAMP THAT COSTS ZERO ELECTRICITY

产品特性

散热器为6063铝，采用加厚防腐喷漆处理
锂电池，定制磷酸铁锂
不需要额外的布线，节省安装成本
进口灯珠，光效高达150LM/W
3年质保 防护等级: IP65

FEATURES

Radiator is 6063 aluminum and is treated by thickening anticorrosive paint spraying
Lithium battery, customized lithium iron phosphate
No extra wiring required, save installation cost
Imported lamp bead with light efficiency up to 150LM/W
3 years warranty IP grade: IP65

灯具材质

6063铝

MATERIAL

6063 aluminum

应用场景

广泛应用于城市广场、停车场、学校操场、工人绿地、公园照明，乡镇等偏远地区公路街道照明


MATERIAL

Widely used in city square, parking lot, school playground, worker green space, park lighting, Towns and other road and street lighting in remote areas



光控+时控模式

LIGHT CONTROL + TIME CONTROL MODE

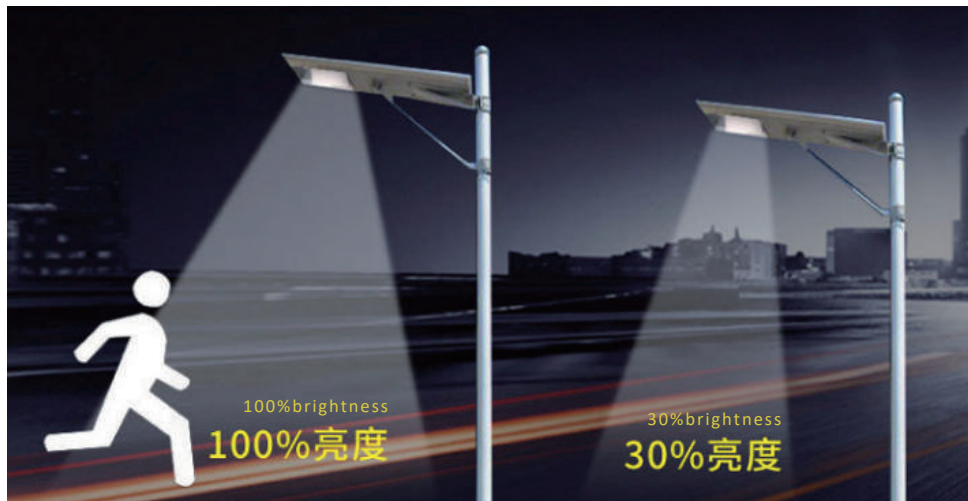

全亮模式 All light pattern ●


前四小时100%功率输出
100% power output in the first four hours

省电模式 Power saving mode ●

后四小时30%功率输出
After 4 hours 30% power output

人体感应

HUMAN BODY INDUCTION

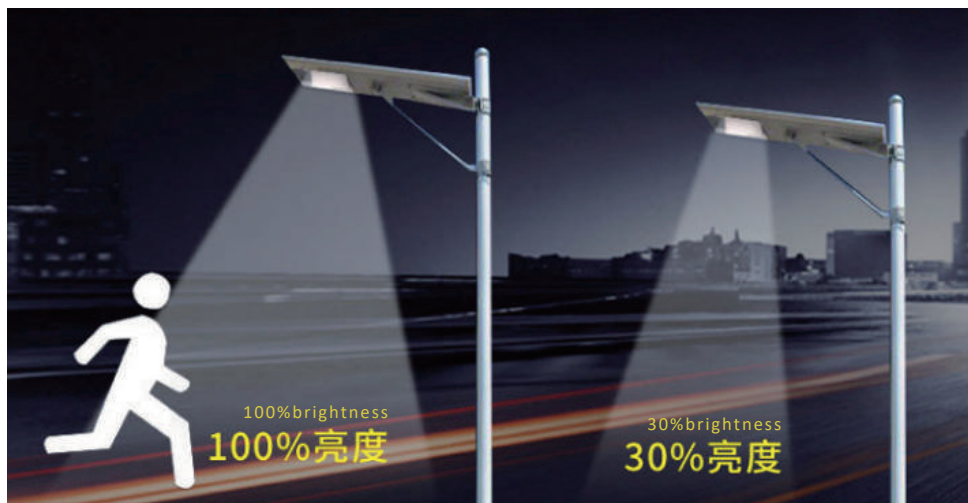

全亮模式 All light pattern ●


当人进入人体感应120度范围内，灯光会自动慢慢亮起，达到100%亮度，进去全亮模式
When the human body enters the range of 120 degrees, the light will automatically slow Shine up to 100% brightness in full - brightness mode

省电模式 Power saving mode ●

当人离开一分钟后，灯光慢慢暗下来达到30%亮度，进入省电模式
When the person leaves for a minute, the light slowly darkens to 30% brightness. Enter power saving mode

安装模式

INSTALLATION

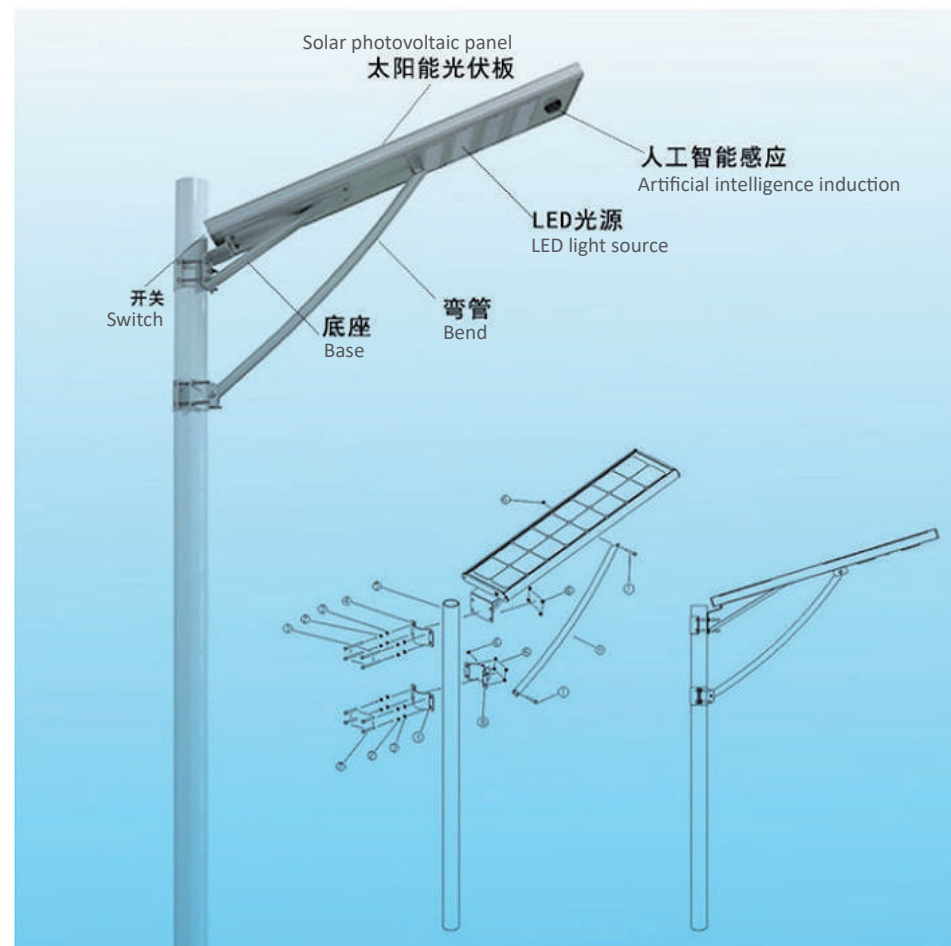

工程案例 ENGINEERING CASE



合作伙伴 PARTNERS

